



## Heat transfer in MHD nanofluid flow over a cone and plate in the presence of heat source/sink

C. S. K. Raju<sup>a</sup>, Sandeep Naramgari<sup>b</sup> and M. S. Jagadeesh Kumar<sup>a\*</sup>

<sup>a</sup> Fluid Dynamics Division, Vellore Institute of Technology, Vellore-632014, Tamil Nadu, India

<sup>b</sup> Department of Mathematics, Central University of Karnataka, Kalaburagi-585367

---

### Article info:

Received: 17/03/2016

Accepted: 21/08/2016

Online: 15/07/2017

---

### Keywords:

MHD,  
Convection,  
Heat source/sink,  
Ferrofluid,  
Cone/Plate.

### Abstract

In this study, a mathematical model for analyzing the heat source/sink effect on magnetohydrodynamic two-dimensional ferrofluid flow past a cone and a vertical plate in the presence of volume fraction of ferrous nanoparticles is presented. The governing partial differential equations are transformed as ordinary differential equations making use of similarity solutions and solved numerically with the aid of Runge-Kutta based shooting technique. The limiting case of the present results shows a good agreement with the published results. The solutions for the flow over a cone and a vertical plate cases are presented. The influence of dimensionless parameters on velocity and temperature profiles along with the friction factor coefficient and the heat transfer rate are analyzed with the help of graphs and tables. It is found that the rising value of the volume fraction of ferrous nanoparticles enhances the friction factor coefficient and heat transfer rate. It is also found that heat transfer performance of the flow over a plate is comparatively higher than the flow over a cone.

## 1. Introduction

The latest development of recent technologies has challenging applications in fluid flows past a cone. It has demanded applications in many of the real life situations like hospitality and health care management systems, energy storage systems, aeronautical, geosciences, micro-inverter chips, astro-physics, space technology, geology, automotive engine oil controlling systems, environment controlling factors and power management in nuclear safety systems.

Owing to this importance, the flow past a cone was first originated by Tien [1] in 1960's. Further, Kumari et. al. [2] and Chamka [3] have studied the various flow dimensions and effects. Nadeem and Saleem [4] discussed an unsteady MHD flow of rotating cone in a rotating frame. Patrulescu et al. [5] investigated the mixed convection nanofluid flow past a vertical truncated cone. An unsteady nanofluid flow past a vertically rotating cone was illustrated by Saleem and Nadeem [6]. Rushikumar and Sivaraj [7] were considered the heat transfer analysis of viscoelastic fluid flow over a cone and plate in the

---

Corresponding author  
email address: nsrjgi@gmail.com

presence of magnetic field and variable viscosity. Raju et al. [8] studied the Jeffery nanofluid flow past a permeable cone in the presence of radiation and chemical reaction effects. Heat and mass transfer characteristics of bio-convection flow past a rotating cone/plate in a rotating fluid was examined by Raju and Sandeep [9-10]. In this paper they concluded that the buoyancy parameter enhances the Nusselt number and Sherwood number values.

Ferro fluids are the colloidal dispersion of magnetic particles that are nanometer in size. Based on the coating of the surface the ferro fluids can be identified as surfacted ferrofluid and ionic ferrofluid. In a surfacted ferrofluid the coating is a surfactant molecule and the ionic ferrofluid coating is filled with an electrical shell. Scherer and Figueiredo Neto [11] presented the engineering applications such as space craft propulsion, instrumentation, chemotherapy, petroleum industries, endoscopy, radiology treatment, doping of technological applications, printer inks, jet airway wings, sealing technology, magnetic hyperthermia, cells separation, MEMS, magnetic resonance imaging process etc. Raju et al. [12] analyzed the effect of radiation on ferrofluid flow past a flat plate in the presence of aligned magnetic field and non-uniform heat source/sink. An unsteady micro polar fluid flow over a porous vertical plate by using modified Boussinesq approximation model was studied by Animasun [13]. Khan et al. [14] studied the uniform heat flux effect on ferrofluid flow past a flat plate and concluded that the magnetite ferrous particle have higher heat transfer rate than kerosene-based cobalt ferrite particles. Raju et al. [15-16] investigated the flow of nanofluid past a permeable vertical plate in the presence of non-uniform heat source/sink. An external magnetic field effect on convection flow of ferrofluid in a heated cavity was depicted by Sheikholeslami and Bandpy [17]. Sugunamma et al. [18] discussed the magneto hydrodynamic flow of dusty nano over a cone in the presence of chemical reaction and non-uniform heat source/sink. A three-dimensional non-Newtonian ferro and nano fluids towards a bidirectional stretching sheet was investigated Raju and Sandeep [19] and concluded that ferrous particles

are regulate the velocity profiles. Sandeep et al. [20] studied the non-uniform heat source/sink effect on an unsteady MHD flow of a nanofluid through a stretching surface in the presence of thermophoresis parameter and highlight the an unsteadiness parameter reduces the velocity profiles. The heat and mass transfer characteristics of a viscoelastic fluid flow with nonlinear thermal radiation and induced magnetic field was considered by Annimasun et al. [21]. Ramanareddy et al. [22] illustrated the stagnation point flow of a magneto-nanofluid flow past a stretching surface in the presence of induced magnetic field and concluded that the volume fraction of nanoparticle improves the temperature profiles. The magneto hydrodynamic flow of nanofluid towards a nonlinear stretching surface was investigated numerically by Mabood et al. [23]. Khan et al. [24] discussed the stagnation point flow of ferrofluid over a stretching surface in the presence of magnetic field effect. Thermal radiation effect on heat transfer characteristics of flow over stretching surface filled with ferrous particles was examined by Rani Titus and Abraham [25]. Sandeep and Sulochana [26] examined the magneto hydrodynamic flow of dusty nanofluid towards a stretching sheet filled with volume fraction of dust particles and concluded that fluid particle interaction parameter due to temperature has boost up the thermal conductivity of fluid particle phase.

In continuation of above studies, present paper addresses the effect of heat source/sink on the flow of MHD ferrofluid, over a cone and plate. The transformed governing equations are solved numerically using Runge-Kutta based shooting technique. In this study, we presented dual solutions for the flow over a cone and plate. The influence of dimensionless parameters on velocity and temperature profiles along with the friction factor coefficient and the heat transfer rate are discussed with the help of graphs and tables.

## 2. Mathematical formulation

Consider a steady, two dimensional, incompressible flow of a ferrofluid over a cone and plate in the presence of heat source/sink.

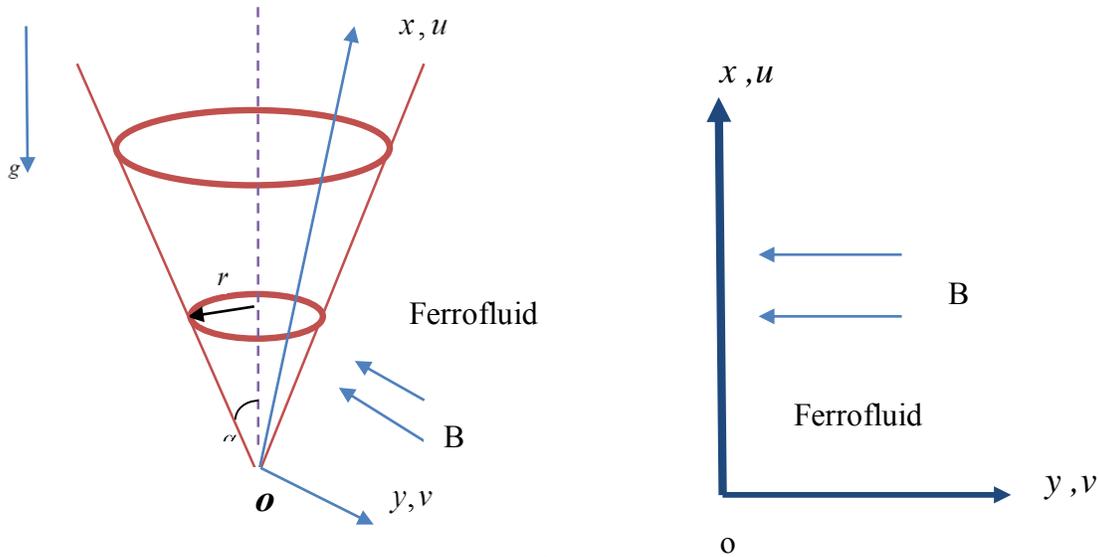


Fig. 1. Schematic representation.

The physical system describe the  $x$ -axis is taken along the surface of the cone the  $y$ -axis is normal to the surface of the cone. The radius of the cone and the half angle are taken as  $r$  and  $\gamma$ . It is assumed that a variable magnetic field  $B(x) = B_0 / x(Gr)^{-1/4}$  is acting along the  $x$ -direction as displayed in Fig. 1. The flow is considered along  $x$ -direction, suction/injection velocity neglected in this study. Induced magnetic field is neglected in this study. We have used  $T_w$  and  $T_\infty$  to represent the temperature near and far away from the cone/plate respectively. In view of the above assumption the flow can be modeled using the following equations. (see [7])

2.1 Flow analysis:

$$\frac{\partial}{\partial x}(r^h u) + \frac{\partial}{\partial y}(r^h v) = 0, \tag{1}$$

$$\rho_{nf} \left( u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = \left( \begin{matrix} \mu_{nf} \frac{\partial^2 u}{\partial y^2} + g(\rho\beta)_{nf}(T - T_\infty)\cos\gamma \\ -\sigma B_0^2 u \end{matrix} \right), \tag{2}$$

with the boundary conditions:

$$\left. \begin{matrix} u = 0, v = 0, & \text{at } y = 0, \\ u \rightarrow 0, & \text{as } y \rightarrow \infty, \end{matrix} \right\} \tag{3}$$

where  $h = 1$  denotes the flow over a vertical cone and  $h = \gamma = 0$  represents the flow over a vertical plate,  $u, v$  are the velocity components along the  $x, y$  directions respectively.  $\rho_{nf}$  is the density of the nanofluid,  $\mu_{nf}$  is the viscosity coefficient,  $g$  is the acceleration due to gravity,  $(\rho\beta)_{nf}$  is the thermal expansion coefficient due to temperature difference,  $\sigma$  is the electric conductivity,  $\nu$  is the kinematic viscosity. To convert the nonlinear coupled partial differential equations into ordinary nonlinear differential equations we have used the self-similarity transformations

$$\left. \begin{matrix} u = \frac{v_f}{x} (Gr)^{1/2} f'(\eta), \eta = \frac{y}{x} (Gr)^{1/4}, \\ v = \frac{v_f}{x} (Gr)^{1/4} \left( \frac{\eta}{4} f'(\eta) - \frac{1}{2} f(\eta) \right), \\ T = T_\infty + (T_w - T_\infty)\theta(\eta), \\ Gr = \frac{\rho g x^3 \beta_T (T_w - T_\infty)}{\nu^2}, \end{matrix} \right\} \tag{4}$$

where  $u$  and  $v$  satisfies the continuity equation and the nanofluid constants are given by

$$\left. \begin{aligned} \rho_{nf} &= (1-\phi)\rho_f + \phi\rho_s, \mu_{nf} = \frac{\mu_f}{(1-\phi)^{2.5}}, \\ \frac{k_{nf}}{k_f} &= \frac{(k_s + 2k_f) - 2\phi(k_f - k_s)}{(k_s + 2k_f) + \phi(k_f - k_s)}, \\ (\rho c_p)_{nf} &= (1-\phi)(\rho c_p)_f + \phi(\rho c_p)_s, \end{aligned} \right\} \quad (5)$$

By making use of Eqs. (4, 5), the transformed Eq. (1) to 2) as follows:

$$\left( \frac{1}{(1-\phi)^{2.5}} \right) f''' + \left( \frac{ff''}{4} - \frac{f'^2}{2} \right) \left( (1-\phi) + \phi \left( \frac{\rho_s}{\rho_f} \right) \right) - Mf' + \left( (1-\phi) + \phi \left( \frac{\rho\beta_s}{\rho\beta_f} \right) \right) \lambda\theta = 0, \quad (6)$$

The transformed boundary conditions are:

$$\left. \begin{aligned} f = 0, f' = 0, \quad \text{at } \eta = 0, \\ f' \rightarrow 0, \quad \text{as } \eta \rightarrow \infty, \end{aligned} \right\} \quad (7)$$

where  $\phi$  is the volume fraction of nano particles,  $M$  is the magnetic field parameter,  $\rho_f, \rho_s$  are the densities of the fluid and solids respectively,  $\lambda$  is the buoyancy parameter,  $(T_w - T_\infty) > 0$  is for assisting flow and  $(T_w - T_\infty) < 0$  is for restricting flow and

$$M = \frac{\sigma x^2 B_0^2}{(Gr)^{1/2} \rho_f}, \lambda = \frac{g \beta_f (T_w - T_\infty) \cos \gamma}{v^2 Gr} \quad (8)$$

### 2.2 Heat Transfer analysis

The boundary layer energy equation with non-uniform heat source/sink and heat source parameters are given by

$$(\rho c_p)_{nf} \left( u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = k_{nf} \frac{\partial^2 T}{\partial y^2} - Q_0(T - T_\infty), \quad (9)$$

The corresponding boundary conditions are:

$$T = T_w, \text{ at } y = 0, T \rightarrow T_\infty, \text{ as } y \rightarrow \infty, \quad (10)$$

where  $(\rho c_p)_{nf}$  is the heat capacity of the nanofluid,  $T$  is the fluid temperature,  $T_w, T_\infty$  are the near and the far away temperature,  $k_{nf}$  is the thermal conductivity of the nanofluid,  $c_p$  is the specific heat capacitance at constant pressure,  $c_s$  is the concentration susceptibility and  $Q_0$  is the heat source/sink parameter.

By using self-similarity transformations of Eqs. (4, 5), the Eq. (9) reduced to

$$\frac{k_{nf}}{k_f} \theta'' + \text{Pr} f \theta' \left( (1-\phi) + \phi \frac{(\rho c_p)_s}{(\rho c_p)_f} \right) + \text{Pr} Q_H \theta = 0, \quad (11)$$

The corresponding transformed boundary conditions are

$$\theta(0) = 1, \theta(\infty) = 0, \quad (12)$$

where  $\text{Pr}$  is the Prandtl number and  $Q_H$  is the non-dimensional the heat source/sink parameter which are given by

$$\text{Pr} = \frac{k_f}{(\mu c_p)_f}, Q_H = \frac{Q_0 x^2}{Gr}, \quad (13)$$

For physical quantities of interest, the friction factor coefficients and the rate of heat transfer is given by

$$C_{fx} \text{Re}^{1/2} = \frac{1}{(1-\phi)^{2.5}} f''(0), \quad (14)$$

$$\text{Re}^{-1/2} \text{Nu}_x = -\frac{k_{nf}}{k_f} \theta'(0), \quad (15)$$

where  $\text{Re} = \frac{xu_w(x)}{\nu}$  is the Reynolds number.

### 3. Results and discussion

The set of nonlinear coupled ordinary differential Eqs. (6 and 11) subjected to the boundary

conditions (7) and (12) are solved numerically using Runge-Kutta based shooting method. The influence of pertinent parameters on velocity and temperature profiles along with the friction factor coefficient and local Nusselt numbers has been discussed and presented through graphs and tables. For numerical computations we have taken the non-dimensional parameter values as  $M = 0.3, \lambda = 0.1, K = 0.3, Q_H = 0.4, Pr = 6.72$ . These values are kept as constant in entire study except the variations in the corresponding figures and tables.

The variations of velocity and temperature fields against magnetic field parameter are plotted in Figs. 2 and 3 for both the geometry (the flow over a cone and a plate). It shows that an increase in the magnetic field parameter weakens the velocity field and strengthens the temperature field in both the cases. Physically, increasing values of the magnetic field parameter creates a resistive type drag force (Lorentz's force) that dominates the velocity profiles. Figures 4 and 5 depict the variations in velocity and temperature profiles against nanoparticle volume fraction for both cases. It is noticed that the velocity profiles are enhanced and temperature profiles are depreciated for higher values of the nanoparticle volume fraction. Physically, increasing values of volume fraction of nano particles decreases the size of the nano particles. This leads to enhance the momentum and reduce the thermal boundary layers.

Figures 6-7 depict the effect of buoyancy parameter on velocity and temperature fields for both cases. It is obvious that increasing values of the buoyancy parameter causes to decrement in the thermal boundary layer thickness and increment in the momentum boundary layer thicknesses. This may be due to the fact that the buoyancy forces are less dominant in the flow and causes an enhancement in the flow velocity. The influence of heat source/sink parameter on velocity and temperature profiles is displayed in Figs. 8 and 9. This shows that rising values of the heat source/sink parameter depreciates both the velocity and temperature profiles of the flow. This concludes that  $Q_H$  acts like heat absorption parameters. Table 1 demonstrates the thermo physical properties of base and ferrofluid. Table 2 shows the compares the limiting cases of

the present results with the published results and found a good agreement in supportive of the present study.

Tables 3 and 4 depict the variations in the friction factor coefficients and the Nusselt number for the flow over a cone and plate cases for different values of non-dimensional governing parameters. It is observed that arise in the ferroparticle volume fraction improves the friction factor coefficients as well as Nusselt number. The quite similar results are observed in the presence of buoyancy parameter. The magnetic field parameter depreciates the friction factor coefficient and Nusselt number in both the cases. It is interesting to mention that the friction factor coefficient is reduced and the rate of heat transfer is improved for increasing values of the heat source/sink parameter.

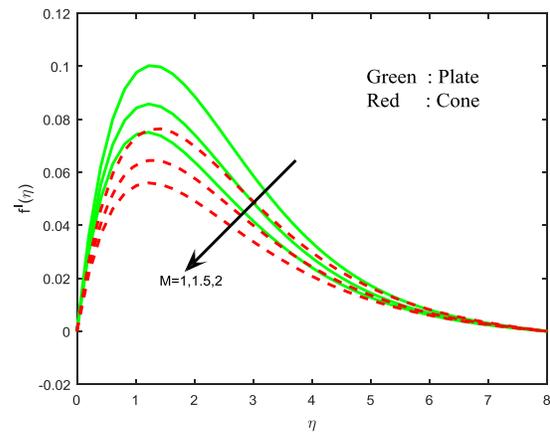


Fig. 2. Velocity profile for different values of magnetic field parameter.



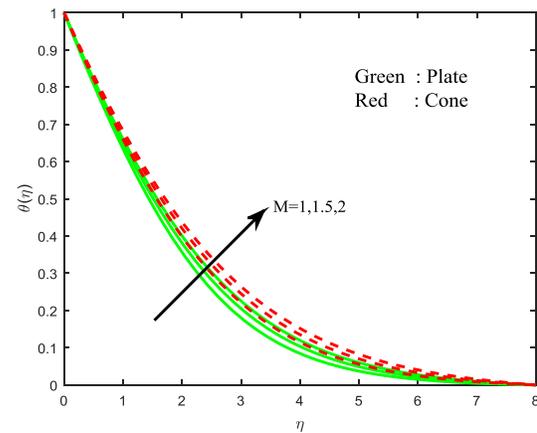



Fig. 3. Temperature profiles for different values of magnetic field parameter.

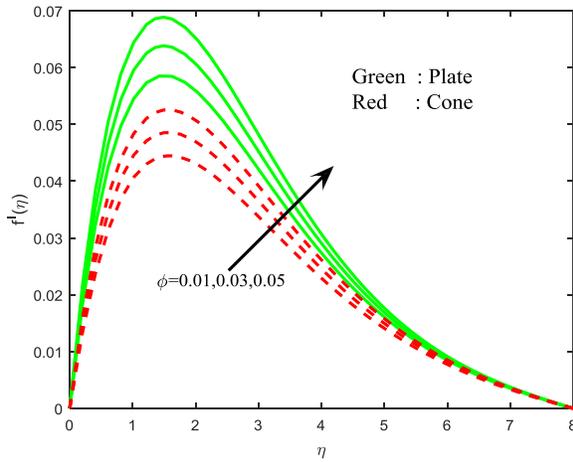


**Fig. 4.** Velocity profiles for different values of the nano particle volume fraction.

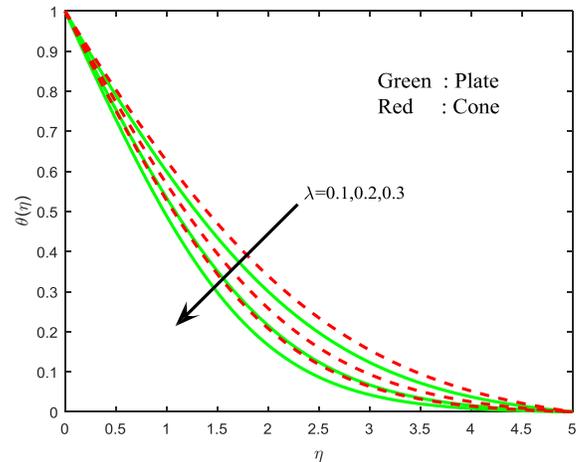


**Fig. 7.** Temperature profile for different values of the buoyancy parameter.

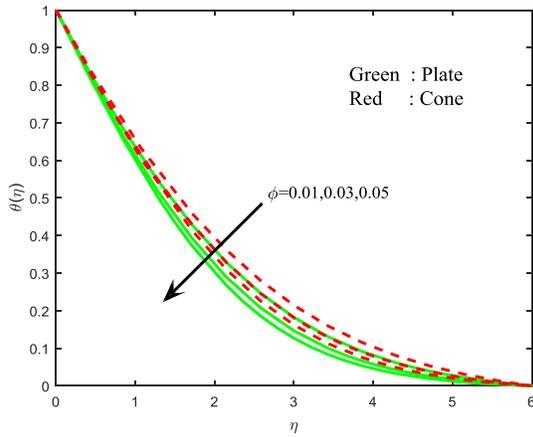


**Fig. 5.** Temperature profiles for different values of the nano particle volume fraction.

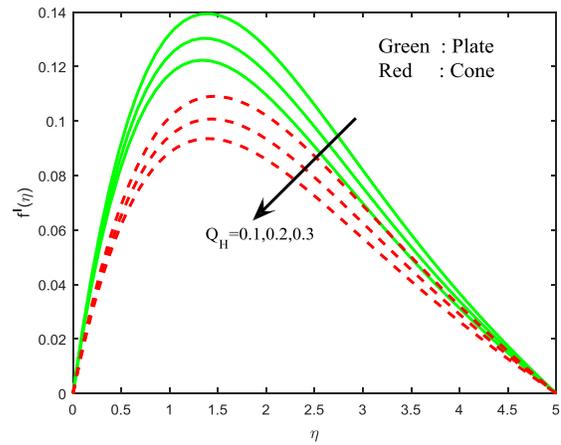

**Fig. 8.** Velocity profiles for different values of heat source parameter.

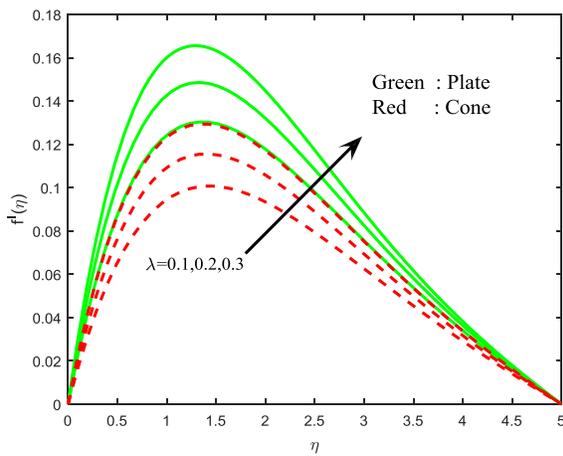

**Fig. 6.** Velocity profiles for different values of the buoyancy parameter.

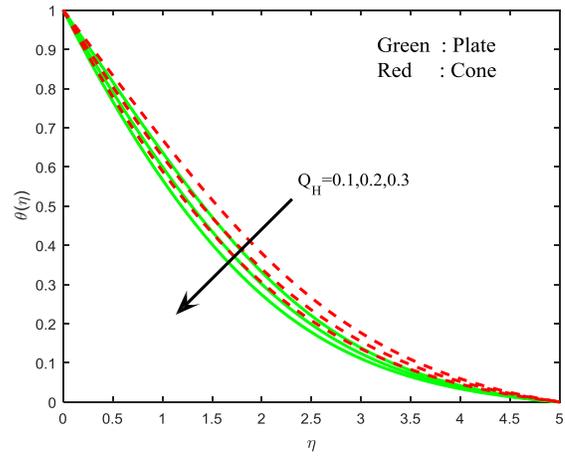

**Fig. 9.** Temperature profiles for different values of heat source parameter.

**Table 1.** Thermo physical properties kerosene and  $Fe_3O_4$ .

Thermo Physical Properties	Kerosene	$Fe_3O_4$
$\rho$ (kg/m <sup>3</sup> )	783	5180
$C_p$ (J/kg K)	2090	670
$k$ (W/m K)	0.15	9.7
$\beta \times 10^{-5}$ (1/K)	9.9	2.1

**Table 2.** Validation of the present results when  $M = A^* = B^* = K = Q_H = \phi = 0$ .

$\lambda$	Pr = 0.7			Pr = 1			Pr = 10		
	$-\theta'(0)$	$-\theta'(0)$	$-\theta'(0)$	$-\theta'(0)$	$-\theta'(0)$	$-\theta'(0)$	$-\theta'(0)$	$-\theta'(0)$	$-\theta'(0)$
↓	Anilkumar and Roy [16]	Raju et al. [8]	Present	Anilkumar & Roy [16]	Raju et al. [8]	Present	Anilkumar & Roy [16]	Raju et al. [8]	Present
0	0.4305	0.47697	0.4299	0.557294	0.5180	0.5570	1.4042	1.6359	1.4952
1	0.6127	0.60041	0.6020	0.721982	0.7005	0.7005	1.5885	2.0911	2.0912
10	1.0175	0.99523	1.0175	1.170983	1.1494	1.1709	2.3528	2.7734	2.7735

**Table 3.** The physical parameter values of skin friction coefficient and local Nusselt number.

$M$	$\phi$	$\lambda$	$Q_H$	Skin friction coefficient		Nusselt number	
				Cone	Plate	Cone	Plate
1				0.116341	0.159440	0.375841	0.402855
1.5				0.105614	0.145666	0.362430	0.387356
2				0.097467	0.135037	0.352445	0.375457
	0.01			0.072642	0.099678	0.379573	0.399252
	0.03			0.078834	0.107994	0.382814	0.403635
	0.05			0.084659	0.115799	0.385751	0.407599
		0.1		0.137480	0.186572	0.409918	0.437828
		0.2		0.251698	0.337767	0.470708	0.508588
		0.3		0.354910	0.473788	0.515522	0.559264
			0.1	0.143936	0.194043	0.333604	0.367939
			0.2	0.137480	0.186572	0.409918	0.437828
			0.3	0.131805	0.179849	0.479418	0.502457

#### 4. Conclusions

This study deals with the numerical investigation of heat source/sink effect on magnetohydrodynamic ferrofluid flow past a cone and plate in the presence of volume fraction of ferrous nanoparticles. The following conclusions have been derived:

- Thermal boundary layer thickness is high for the flow over a cone when compared with flow over a plate.
- Suspension of ferrous nanoparticles improves the thermal conductivity of the flow.

- Rise in the magnetic field parameter depreciates both the friction factor and rate of heat transfer.
- The buoyancy parameter and the volume fraction of nano particles enhance the flow as well as the heat transfer rate.
- Increasing values of the heat source/sink parameter improves the Nusselt number and suppresses the skin friction coefficient.

## References

- [1] C. L. Tien, "Heat transfer by laminar flow from a rotating cone", *ASME J. Heat Transfer*, Vol. 82, No.3, pp. 252-253, (1960).
- [2] M. Kumari, I. Pop, G. Nath, "Mixed convection along a vertical cone", *Int. Comm. Heat Mass Transfer*, Vol. 16, No. 2, pp. 247-255, (1989).
- [3] A. J. Chamka, "Coupled heat and mass transfer by natural convection about a truncated cone in the presence of magnetic field and radiation effects", *Numerical Heat Transfer, Part-A: Applications: An Int. J. Comp. Method.*, Vol. 39, No. 5, pp. 511-530, (2001).
- [4] S. Nadeem, S. Saleem, Analytical treatment of unsteady mixed convection MHD flow on a rotating cone in a rotating frame, *J. Taiwan Insti. Chem. Eng.*, Vol. 44, No. 4, pp. 596-604, (2013).
- [5] F. O. Patrulescu, T. Grosan, I. Pop, "Mixed convection boundary layer flow from a vertical truncated in a nanofluid", *Int. J. Numeric. Methods for Heat & Fluid Flow*, Vol. 24, No. 5, pp. 1175-1190, (2014).
- [6] S. Saleem, S. Nadeem, R. UI Haq, "Buoyancy and metallic particle effects on an unsteady water-based fluid flow along a vertically rotating cone", *Eur. Phys. J. Plus*, Vol. 129, No.10, p. 213, (2014).
- [7] B. Rushikumar, R. Sivaraj, "Heat and mass transfer in MHD viscoelastic fluid flow over a vertical cone and flat plate with variable viscosity", *Int. J. Heat and Mass Transfer*, Vol. 56, No. 1-2, pp. 370-379, (2013).
- [8] C. S. K. Raju, M. Jayachandrababu, N. Sandeep, "Chemically reacting radiative MHD Jeffery nanofluid flow over a cone in porous medium", *Int. J. Eng. Res. In Africa*, Vol. 19, pp. 75-90, (2016).
- [9] Chakravarthula S K Raju, Naramgari Sandeep, "Dual solutions for unsteady heat and mass transfer in Bio-convection flow towards a rotating cone/plate in a rotating fluid", *Int. J. Eng. Res. In Africa*, Vol. 20, pp. 161-176, (2016).
- [10] C. S. K. Raju, N. Sandeep, "Heat and mass transfer in MHD non-Newtonian bio-Convection flow over a rotating cone/plate with cross diffusion", *J. of Molecular Liquids*, Vol. 215, pp. 115-126, (2016).
- [11] C. Scherer, A. M. Figueiredo Neto, "Ferrofluids: Properties and Applications", *Brazilian J. Physics*, Vol. 35, No. 3A, pp. 718-727, (2005).
- [12] C. S. K. Raju, N. Sandeep, C. Sulochana, V. Sugunamma, "Effects of aligned magnetic field and radiation on the flow of ferrofluids over a flat plate with non-uniform heat source/sink", *Int. J. Sci. Eng.*, Vol. 8, No. 2, pp. 151-158, (2015).
- [13] I. L. Animasaun, "Double diffusive unsteady convective micropolar flow past a vertical porous plate moving through binary mixture using modified Boussinesq approximation, *Ain Shams Engineering Journal*, (2015), <http://dx.doi.org/10.1016/j.asej.2015.06.010>.
- [14] W. A. Khan, Z. H. Khan, R. U. Haq, "Flow and heat transfer of ferrofluids over a flat plate with uniform heat flux", *The European Physical Journal*, Vol. 130, No. 4, 86, (2015).
- [15] C. S. K. Raju, M. Jayachandrababu, N. Sandeep, P. Mohankrishna, "Influence of non-uniform heat source/sink on MHD nanofluid flow over a moving vertical plate in porous medium", *Int. J. Sci. & Eng. Res.*, Vol. 6, No. 9, pp. 31-42, (2015).
- [16] M. Sheikholeslami, M. G. Bandy, "Free convection of ferrofluid in a cavity heated from below in the presence of an external magnetic field", *Powder Technology*, Vol. 256, pp. 490-498, (2014).
- [17] D. Anilkumar, S. Roy, "Unsteady mixed convection flow on a rotating cone in a rotating fluid", *App. Math. Computation*, Vol. 155, No. 2, pp. 545-561, (1963).
- [18] V. Sugunamma, J. V. Ramanareddy, N. Sandeep, C. S. K. Raju, "Chemically reacting MHD dusty nanofluid flow over a vertical cone with non-uniform heat source/sink", *Walailak Journal of Science and Technology*, Vol. 14, No. 2, pp. 141-156, (2017).
- [19] Chakravarthula SK Raju, Naramgari Sandeep, "Heat and mass transfer in 3D non-Newtonian nano and Ferrofluids over

- a bidirectional stretching surface”, *International Journal of Engineering Research in Africa*, Vol. 21, pp. 33-51, (2015).
- [20] N. Sandeep, C. Sulochana, C. S. K. Raju, V. Sugunamma, “Unsteady boundary layer flow of thermophoretic MHD nanofluid past a stretching sheet with space and time dependent internal heat source/sink”, *Applications and Applied Mathematics, an international journal*, Vol. 10, No. 1, pp. 312-327, (2015).
- [21] I. L. Annimasun, C. S. K. Raju, N. Sandeep, “Unequal diffusivities case of homogeneous-heterogeneous reactions within viscoelastic fluid flow in the presence of induced magnetic field and nonlinear thermal radiation”, *Alexandria Engineering journal*, (2016) In press, <http://dx.doi.org/10.1016/j.aej.2016.01.018>.
- [22] J. V. Ramanareddy, V. Sugunamma, N. Sandeep, C. S. K. Raju, M. Jayachandrababu, “Induced magnetic field effect on stagnation point flow of magnetonanofluids towards a stretching sheet”, *Advance Science, Engineering and Medicine*, Vol. 7, No. 11, pp. 968-974, (2015).
- [23] F. Mabood, W. A. Khan, A. I. M. Ismail, “MHD boundary layer flow and heat transfer of nanofluids over a nonlinear stretching sheet: A numerical study”, *J. Magnetism and Magnetic Materials*, Vol. 374, pp. 569-576, (2015).
- [24] Z. H. Khan, W. A. Khan, M. Qasim, I. AliShah, “MHD stagnation point ferrofluid flow and heat transfer towards a stretching sheet”, *IEEE Transactions on Nanotechnology*, Vol. 13, No. 1, pp. 35-40, (2014).
- [25] L. S. Rani Titus, A. Abraham, “Heat transfer in ferrofluid flow over a stretching sheet with radiation”, *Int. J. Eng. Res. & Tech.* Vol. 3, No. 6, (2014).
- [26] N. Sandeep, C. Sulochana, “MHD flow of dusty nanofluid over a stretching surface with volume fraction of dust particles”, *Alexandria Engineering Journal*, Vol. 7, No. 2, pp. 709-716, (2015).

**How to cite this paper:**

C. S. K. Raju, Sandeep Naramgari and M. S. Jagadeesh Kumar, “ Heat transfer in MHD nanofluid flow over a cone and plate in the presence of heat source/sink”, *Journal of Computational and Applied Research in Mechanical Engineering*, Vol. 7. No. 2, pp. 233-241

**DOI:** 10.22061/jcarme.2017.637

**URL:** [http://jcarme.srttu.edu/?\\_action=showPDF&article=637](http://jcarme.srttu.edu/?_action=showPDF&article=637)

